
A-DQ(SW)2Y max. 24 Fibers

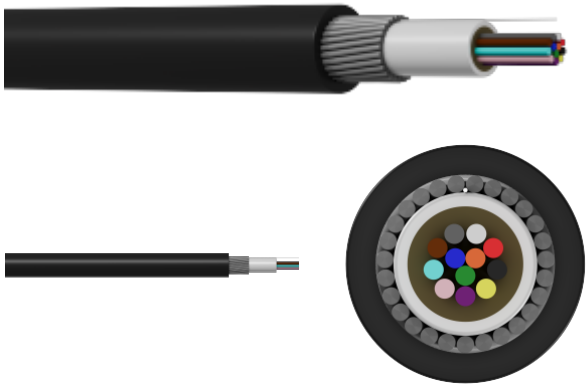

Application

- Rodent-proof cable
- For installation in cable duct system
- Underground itstallation
- Armor
- Water-resistant
- Outdoor itstallation
- High tensile strength

Cabel armoured with zinc-coated steel for manual or mechanical installation in soils of all categories, except soils tend to negative temperature deformations, in case of high requirements for resistance to mechanical loads, in sewage systems, protective pipes, blocks, collectors.

Specifications

Code of cable type	6104	6102	6103
Number of fibers, up to	24		
Number of loose tube	1		
Number of fibers in loose tube	4-24		
Short-term crush test, kN/cm	0,3	0,4	
Dynamic tensile strength, not less than, kN	6,0	7,0	8,0
Operating temperature, °C	-40 ... +70		
Installation temperature, °C	-10 ... +50		
Cable outer diameter, mm	7,4±0,3	8,0±0,3	9,0±0,3

ТОО «КСЕР» (КСЭП)
Республика Казахстан
Карагандинская область
M22E7B8, город Сарань
Улица Шахтерская, дом 30 «А»
БИН 070340007238

«KCEP» LLP
30 «A», Shakhterskaya street
Saran, M22E7B8
Karaganda region
Republic of Kazakhstan
BIN 070340007238

tel./fax
+7 (7212) 912-501
e-mail
info@kcep.kz
web
www.kcep.kz