


KC-OKBO (up to 12 Fibers)



Application

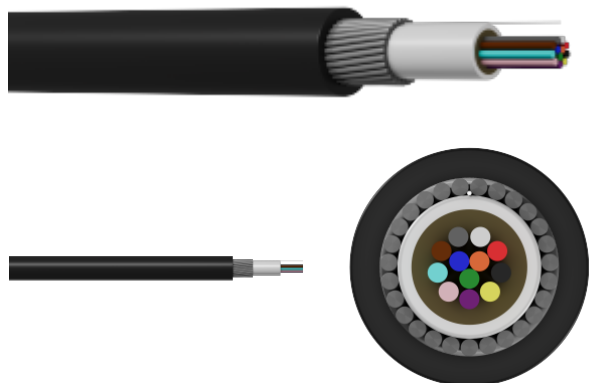

Rodent-proof cable



Underground installation



Armor



Water-resistant



Outdoor installation



High tensile strength

Cable armoured with zinc-coated steel for manual or mechanical installation in soils of all categories, except soils tend to negative temperature deformations, in case of high requirements for resistance to mechanical loads, in sewage systems, protective pipes, blocks, collectors.

Specifications

Code of cable type	6102
Number of fibers	12
Number of loose tube	1
Number of fibers in loose tube	4-12
Short-term crush test, kN/cm	0,4
Dynamic tensile strength, not less than, kN	7,0
Operating temperature, °C	-40 ... +70
Installation temperature, °C	-10 ... +50
Cable outer diameter, mm	8,0±0,3