
A-DQ(ZN)2Y(SR)2Y (max. 96 Fibers)

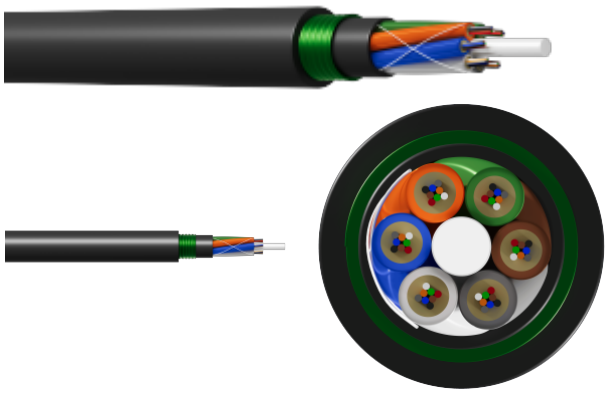

Application

- Rodent-proof cable
- For installation in cable duct system
- Armor
- Water-resistant
- Outdoor itstallation

Armored optical fiber cable for installation in cable ducts, pipes, blocks, collectors, on bridges and in shafts, without bending loads, in case of a risk of cable damage by rodents, in areas with the possibility of flooding for a long time, into the soils of 1-3 categories.

Specifications

Code of cable type	2402	2403	2404
Number of fibers/loose tube	8-48/1 ... 6	12-72/1 ... 6	12-96/1 ... 8
Type of outer sheath	UV-resistant PE		
Number of fillers	5 ... 0		7 ... 0
Max. cable outer diameter, mm	11,1±0,3	12,5±0,2	13,4±0,2
Fiber type, µm	250		
Minimum bending radius	20D		
Installation tensile strength, kN	2,7		3,4
Operating temperature, °C	-40 ... +70	-30 ... +70	
Installation temperature, °C	-10 ... +50		

ТОО «КСЕР» (КСЭП)
Республика Казахстан
Карагандинская область
M22E7B8, город Сарань
Улица Шахтерская, дом 30 «А»
БИН 070340007238

«KCEP» LLP
30 «A», Shakhterskaya street
Saran, M22E7B8
Karaganda region
Republic of Kazakhstan
BIN 070340007238

tel./fax
+7 (7212) 912-501
e-mail
info@kcep.kz
web
www.kcep.kz