
A-DQ(ZN)2Y(SR)2Y (max. 288 Fibers)

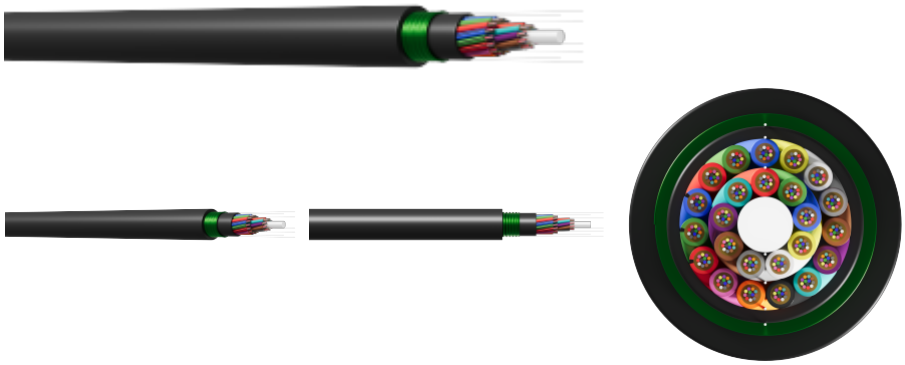

Application

- Rodent-proof cable
- For installation in cable duct system
- Water-resistant
- Outdoor itstallation

Armored optical fiber cable for installation in cable d
blocks, collectors, on bridges and in shafts, without b
case of a risk of cable damage by rodents, in areas w
possibility of flooding for a long time, into the soils o

Specifications

Code of cable type	24124
Number of fibers/loose tube	12-288/1 ... 24
Type of outer sheath	UV-resistant PE
Number of fillers	23 ... 0
Max. cable outer diameter, mm	13,0±0,2
Fiber type, µm	250
Minimum bending radius	20D
Installation tensile strength, kN	4,0
Operating temperature, °C	-30 ... +70
Installation temperature, °C	-15 ... +50

ТОО «КСЕР» (КСЭП)
Республика Казахстан
Карагандинская область
M22E7B8, город Сарань
Улица Шахтерская, дом 30 «А»
БИН 070340007238

«KCEP» LLP
30 «A», Shakhterskaya street
Saran, M22E7B8
Karaganda region
Republic of Kazakhstan
BIN 070340007238

tel./fax
+7 (7212) 912-501
e-mail
info@kcep.kz
web
www.kcep.kz