
Dielectric figure-8 max. 48 Fibers

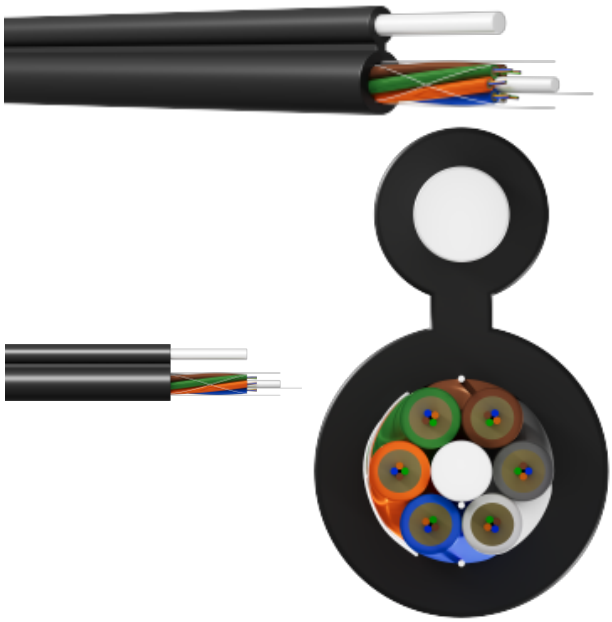

Application

Dielectric

Water-resistant

Aerial

Outdoor itstallation

Multi loose tube aerial installation cable with rope for suspension on communication poles, public lighting poles and between buildings.

Specifications

Code of cable type	3051	3052
Number of fibers, up to	24	
Number of loose tube, up to	6	
Number of fibers in loose tube	4	
Short-term crush test, kN/cm	0,3	
Maximum permissible tensile load, kN	4,0	7,0
Operating temperature, °C	-50 ... +70	
Installation temperature, °C	-10 ... +50	
Cable outer diameter, mm	8,6x14,6	8,6x16,1

ТОО «КСЕР» (КСЭП)
Республика Казахстан
Карагандинская область
M22E7B8, город Сарань
Улица Шахтерская, дом 30 «А»
БИН 070340007238

«KCEP» LLP
30 «A», Shakhterskaya street
Saran, M22E7B8
Karaganda region
Republic of Kazakhstan
BIN 070340007238

tel./fax
+7 (7212) 912-501

e-mail
info@kcep.kz

web
www.kcep.kz