


Air Blow Mini Cable A-DQ(ZN)2Y max. 72 Fiber

Application



For installation in cable duct system

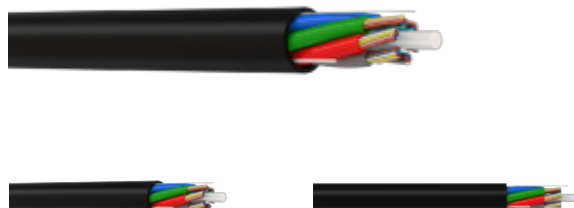

Dielectric



Water-resistant



Air blow



Outdoor installation

Optical fiber cable for duct and micro duct installation by blowing.

Specifications

Code of cable type	1038	1081a	1081
Number of fibers	12-72		
Number of loose tube	1 ... 6		
Number of fillers	5 ... 0		
Cable outer diameter, mm	4,2±0,2	5,6±0,25	6,0±0,3
Fiber type, μm	200	200/250	
Minimum bending radius	20D		
Installation tensile strength, N	600	750	1000
Operating temperature, °C	-20 ... +70 °C	-40 ... +70 °C	
Installation temperature, °C	-10 ... +50 °C		-15 ... +60 °C
Microtube, OD/ID	10/6	10/8 or 12/8	