


Cable for Installation in Cable Duct Systems KC-OKL

Application



Rodent-proof cable

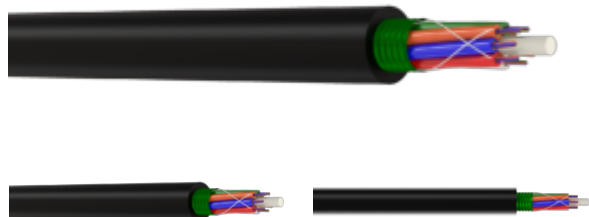

For installation in cable duct system



Armor



Water-resistant



Outdoor installation

For installation in cable ducts, pipes, blocks, collectors, on bridges and in shafts, without bending loads, in case of a risk of cable damage by rodents, in areas with the possibility of flooding for a long time, into the soils of 1-3 categories.

Specifications

Code of cable type	2025	2026	2027	2028	2036	2037
Number of fibers	28	48	96	144	24	48
Number of loose tube	7	6	8	12	6	
Number of fibers in loose tube	4	8	12		4	8
Short-term crush test, kN/cm (N/10cm)	0,35 (3500)				0,3 (3000)	0,4 (4000)
Dynamic tensile strength, not less than, kN	2,5				3,0	
Operating temperature, °C	- 40...+60 °C		- 40...+70 °C			
Installation temperature, °C	- 10...+50 °C					
Cable outer diameter, mm	9,9	11,4	13,5	17,0	8,5	9,9