


Aerial Drop Cable With Steel Wire KC-FTTHSC



Application

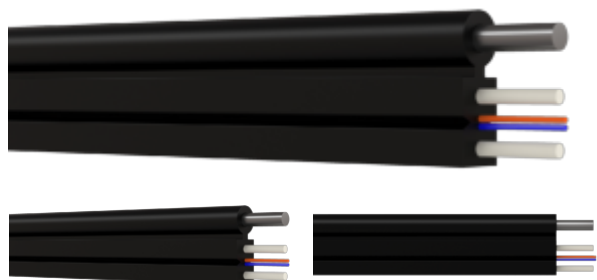

Indoor installation



Halogen-free



Aerial



Outdoor installation



FTTx

For suspension on communication poles and on the walls of the buildings.

Specifications

Code of cable type	4013
Number of fibers	2
Short-term crush test, kN/cm (N/10cm)	0,1 (1 000)
Dynamic tensile strength, not less than, kN	0,6
Operating temperature	- 40...+70 °C
Installation temperature, °C	- 10...+40 °C
Overall dimensions max, thickness x height, mm	2,2x5,6