


Foil Shielded LAN Cable for Outdoor Installation F/UTP



Application

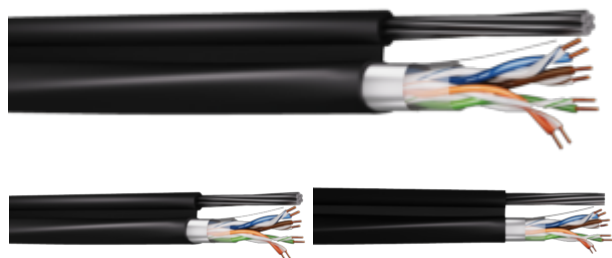

Indoor installation



Halogen-free



Outdoor installation

Cable for structured cable systems for indoor installation with a signal transmission frequency of up to 100MHz (Cat.5e), up to 250MHz (Cat.6).

Specifications

Electrical characteristics	Value
Number of pairs	25
Current-carrying conductor	soft cooper wire
Core diameter	up 0,48 to 0,51 mm
Twisted type	pairing
Minimum bending radius	43
Tensile strength, not less than, kN	0,4
Short-term crush test, kN/cm	40
Sheath type	PE1 - sheath from PE
	PE - 1-st layer sheath made of PVC, 2-nd layer of sheath PE
	PE1 SC, PE SC - with steel rope
Operating temperature, °C	- 40...+60 °C
Installation temperature, °C	- 10...+50 °C
Cable outer diameter max, mm	15,2