
A-DF(ZN)2Y

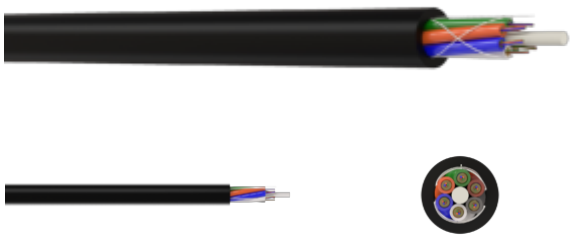

Application

Dielectric

Water-resistant

Air blow

Outdoor itstallation

Multi Loose Tube Optical Fiber Cable without Armoring for installation inin protection pipes by blowing method, in cable racks, on the walls of building in case of absence risks of mechanical damages.

Specifications

Code of cable type	10133	10155	1050
Number of fibers, up to	24	48	
Number of loose tube		6	
Number of fibers in loose tube	4	4 or 8	8
Short-term crush test, kN/cm	0,08	0,05	0,3
Dynamic tensile strength, not less than, kN	1,0	2,7	2,9
Operating temperature, °C		-40 ... +70	
Installation temperature, °C	-15 ... +50	-10 ... +50	
Cable outer diameter, mm	6,2±0,3	7,5±0,3	10,0±0,3

ТОО «КСЕР» (КСЭП)
Республика Казахстан
Карагандинская область
M22E7B8, город Сарань
Улица Шахтерская, дом 30 «А»
БИН 070340007238

«KCEP» LLP
30 «A», Shakhterskaya street
Saran, M22E7B8
Karaganda region
Republic of Kazakhstan
BIN 070340007238

tel./fax
+7 (7212) 912-501

e-mail
info@kcep.kz

web
www.kcep.kz