


A-DQ(ZN)B2Y max. 48 Fiber



Application

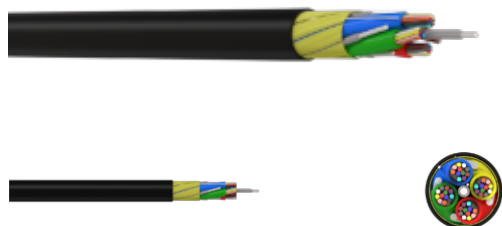

For installation in cable duct system



Dielectric



Water-resistant



Outdoor installation

Optical fiber mini cable for duct and micro duct installation by blowing.

Specifications

Code of cable type	1033
Number of fibers	12-48
Number of loose tube	1 ... 4
Number of fillers	3 ... 0
Max. cCable outer diameter, mm	4,2±0,2
Fiber type, μm	200/250
Minimum bending radius	20D
Installation tensile strength, N	750
Operating temperature, °C	-20 ... +60
Installation temperature, °C	-5 ... +50
Microtube, OD/ID	10/6