
A-DQ(ZN)2Y max. 96 Fibers

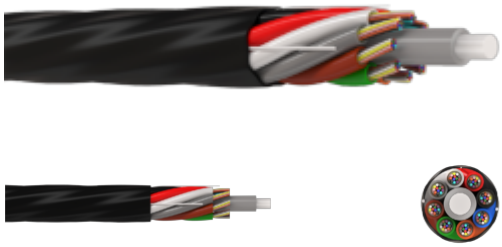

Application

- For installation in cable duct system
- Dielectric
- Water-resistant
- Air blow
- Outdoor itstallation

Optical fiber mini cable for duct and micro duct installation by blowing.

Specifications

Code of cable type	10139	10146	1035b/1036b
Number of fibers/loose tube	12-96/1 ... 8		
Type of outer sheath	UV-resistant PE/PA		
Number of fillers	7 ... 0		
Max. cable outer diameter, mm	4,4±0,2	5,4±0,2	6,0±0,2
Fiber type, µm	200	250	
Minimum bending radius	20D		
Installation tensile strength, N	1 400	1 000	2 000
Operating temperature, °C	-20 ... +70	-40 ... +70	
Installation temperature, °C	-10 ... +50		
Microtube, OD/ID	10/8	10/8 or 12/8	

ТОО «КСЕР» (КСЭП)
Республика Казахстан
Карагандинская область
M22E7B8, город Сарань
Улица Шахтерская, дом 30 «А»
БИН 070340007238

«KCEP» LLP
30 «A», Shakhterskaya street
Saran, M22E7B8
Karaganda region
Republic of Kazakhstan
BIN 070340007238

tel./fax
+7 (7212) 912-501
e-mail
info@kcep.kz
web
www.kcep.kz