A-DQ(ZN)2Y max. 96 Fiber

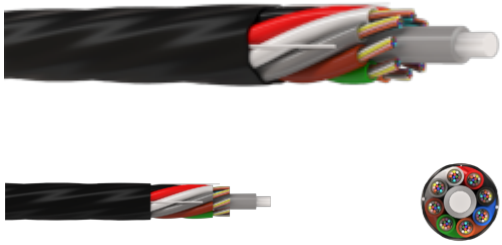

Application

- For installation in cable duct system
- Dielectric
- Water-resistant
- Air blow
- Outdoor itstallation

Optical fiber mini cable for duct and micro duct installation by blowing.

Specifications

Code of cable type	10100	1036b	1036	1034
Number of fibers	12-96			
Number of loose tube	1 ... 8			
Number of fillers	7 ... 0			
Max. cable outer diameter, mm	5,6±0,2	6,2±0,2	6,6±0,2	7,3±0,3
Fiber type, µm	200	200/250		
Minimum bending radius	20D			
Installation tensile strength, N	800	1200	1500	1000
Operating temperature, °C	-20 ... +70	-40 ... +60		-20 ... +60
Installation temperature, °C	-10 ... +50			-10 ... +60
Microtube, OD/ID	10/8 or 12/8		14/10	

ТОО «Kazcentrelectroprovod»
(Казцентрэлектропровод)
Республика Казахстан
Карагандинская область
M22E7B8, город Сарань
Улица Шахтерская, дом 30 «А»
БИН 070340007238

«Kazcentrelectroprovod» LLP
30 «A», Shakhterskaya street
Saran, M22E7B8
Karaganda region
Republic of Kazakhstan
BIN 070340007238

tel./fax
+7 (7212) 912-501
e-mail
info@kcep.kz
web
www.kcep.kz