
A-DQ(ZN)2Y max. 192 Fibers

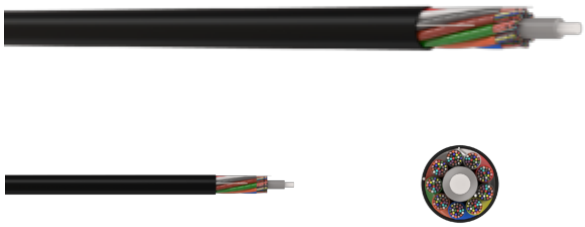

Application

- For installation in cable duct system
- Dielectric
- Water-resistant
- Air blow
- Outdoor itstallation

Optical fiber mini cable for microduct installation by blowing.

Specifications

Code of cable type	10135/10136	10134	10137
Number of fibers/loose tube	24-192/1 ... 8		
Type of outer sheath	UV-resistant PE/PA		
Number of fillers	7 ... 0		
Max. cable outer diameter, mm	6,4±0,2	7,4±0,2	7,6±0,2
Fiber type, µm	200		200/250
Minimum bending radius	20D	15D	20D
Installation tensile strength, N	2 000	4 000	2 500
Operating temperature, °C	-30 ... +70		
Installation temperature, °C	-15 ... +50		
Microtube, OD/ID	10/8 or 12/8	14/10	

ТОО «КСЕР» (КСЭП)
Республика Казахстан
Карагандинская область
M22E7B8, город Сарань
Улица Шахтерская, дом 30 «А»
БИН 070340007238

«KCEP» LLP
30 «A», Shakhterskaya street
Saran, M22E7B8
Karaganda region
Republic of Kazakhstan
BIN 070340007238

tel./fax
+7 (7212) 912-501
e-mail
info@kcep.kz
web
www.kcep.kz