
A-DQ(ZN)B2Y max. 144 Fibers

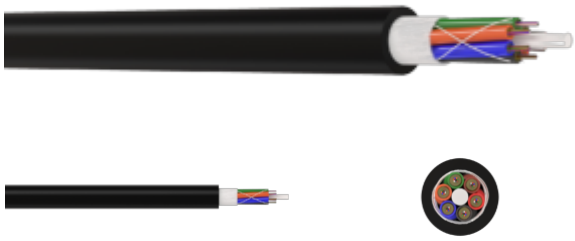

Application

- Rodent-proof cable
- For installation in cable duct system
- Dielectric
- Armor
- Water-resistant
- Aerial
- Outdoor itstallation

Self-support aerial installation cable with glass yarns for suspension between buildings, on lighting poles, on 0,4-10 кV power lines, in cable ducts, pipes, blocks, collectors, on bridges and in shafts, in case of risks of cable damage by rodents.

Specifications

<

Code of cable type	6307a	6307	6328	6319	6324
Number of fibers	24	48	72	96	144
Number of loose tube	6			8	12
Number of fibers in loose tube	4	8	12		
Short-term crush test, kN/cm	0,15				
Maximum permissible tensile load, kN	4,0		4,5	5,5	4,5
Operating temperature, °C	-50 ...+70				
Installation temperature, °C	-10 ...+50				
Cable outer diameter, mm	9,0±0,2		9,6±0,2	11,1±0,3	12,0±0,3

ТОО «КСЕР» (КСЭП)
Республика Казахстан
Карагандинская область
M22E7B8, город Сарань
Улица Шахтерская, дом 30 «А»
БИН 070340007238

«KCEP» LLP
30 «A», Shakhterskaya street
Saran, M22E7B8
Karaganda region
Republic of Kazakhstan
BIN 070340007238

tel./fax
+7 (7212) 912-501
e-mail
info@kcep.kz
web
www.kcep.kz