
A-DQ(ZN)B2Y max. 288 Fibers

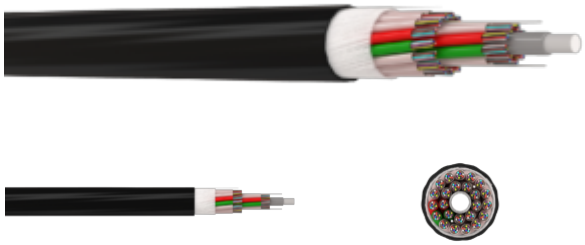

Application

- Rodent-proof cable
- For installation in cable duct system
- Dielectric
- Armor
- Water-resistant
- Outdoor itstallation

Armored optical fiber mini cable with glass yarns for cabling ducts and utility tunnels.

Specifications

Code of cable type	6323	6318	6374
Number of fibers/loose tube	24-288/1 ... 12	12-288/1 ... 24	
Type of outer sheath	UV-resistant PE		
Number of fillers	11 ... 0	23 ... 0	
Max. cable outer diameter, mm	9,7±0,2	10,4±0,2	14,3±0,2
Fiber type, µm	200	250	
Minimum bending radius	20D		
Installation tensile strength, N	2 500		5 000
Operating temperature, °C	-30 ... +70		
Installation temperature, °C	-15 ... +50	-15 ... +60	-10 ... +50

ТОО «КСЕР» (КСЭП)
Республика Казахстан
Карагандинская область
M22E7B8, город Сарань
Улица Шахтерская, дом 30 «А»
БИН 070340007238

«KCEP» LLP
30 «A», Shakhterskaya street
Saran, M22E7B8
Karaganda region
Republic of Kazakhstan
BIN 070340007238

tel./fax
+7 (7212) 912-501
e-mail
info@kcep.kz
web
www.kcep.kz