


Pigtail



Application

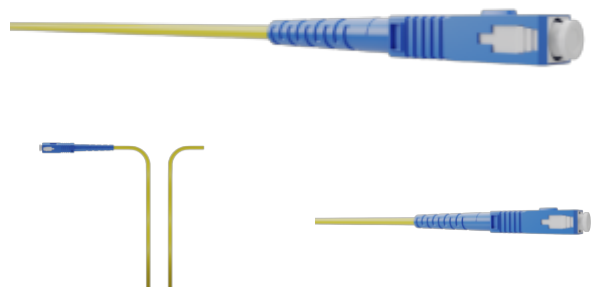

Indoor installation



Dielectric



For installation in Data Center

Pigtails are intended for use termination of a fiber optical cable in optical crosses or boxes fusion splice method or mechanical connecton pigtail running end with fiber

Specifications

Insertion loss, dB	not more than 0,3	
Fiber type, μm	G652	
Sheath material	PVC	
Sheath dimensions, mm	0,9	
Color	yellow	
Length, mm	1 & 1,5 m	
Polishing type	Optical parameters	
	Return loss, dB	Direct loss, dB
PC	not more than -30	not more than 0,3
SPC	not more than -40	not more than 0,3
UPC	not more than -50	not more than 0,3
APC	not more than -60	not more than 0,3
Technical data		
Minimum bending radius, mm	30D	
Operating temperature, $^{\circ}\text{C}$	-30 ... +60	
Installation temperature, $^{\circ}\text{C}$	-10 ... +40	
Storage temperature, $^{\circ}\text{C}$	-40 ... +85	
Relative humidity at +35 $^{\circ}\text{C}$, %	98	