


TECHNICAL DESCRIPTION OF FIBER OPTIC CABLE

Cable type A-DQ(ZN)2Y-24-G.652.D/G.657.A1-UCF200-7206

Cable formula F-PC-PBT+Ar-PE

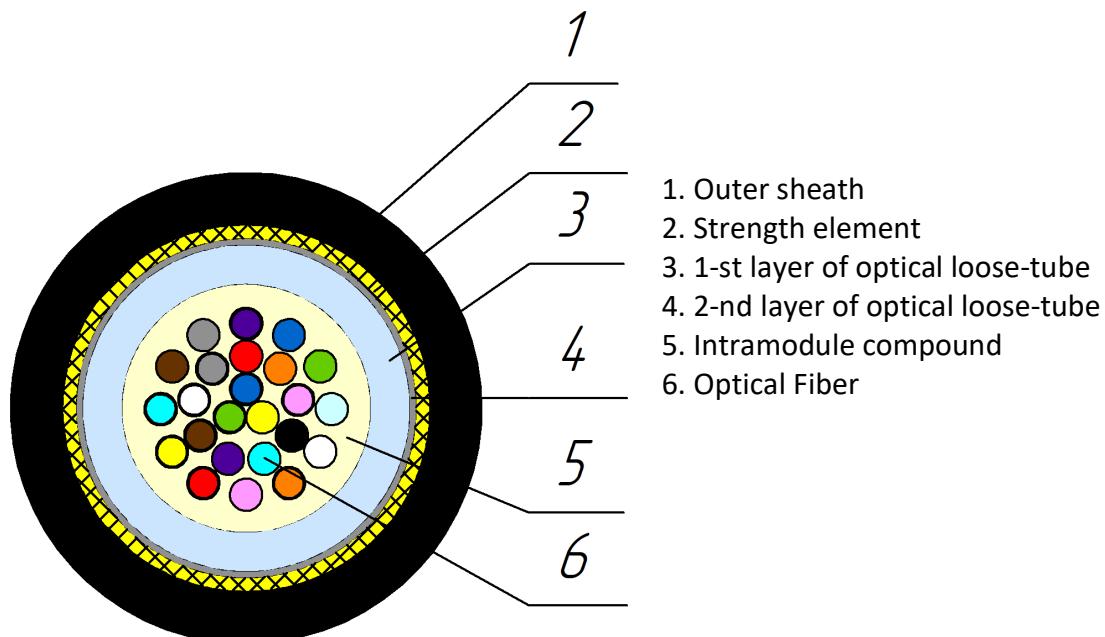

Cable construction	
Outer sheath	UV-resistant PE
Strength element	Aramid yarns
1-st layer of optical loose-tube	PC
2-nd layer of optical loose-tube	PBT 2,3mm tube
Intramodule compound	Thixotropic compound
Optical Fiber	Corning® SMF-28® Ultra 200 Fiber according to ITU-T G.652.D and G.657.A1
Average weight of 1 km of the cable, kg	9,1
Average outer diameter (D), mm	2,9±0,2

Coloring of fibers in loose tube (According to Customer's requirements color can be different). M-fiber with black ring mark.

1	2	3	4	5	6	7	8	9	10	11	12
red	green	blue	yellow	white	slate	brown	violet	aqua	black	orange	pink
red	green	blue	yellow			brown	violet	aqua	black	orange	pink
13	14	15	16	17	18	19	20	21	22	23	24
red+m	green+m	blue+m	yellow+m	white+m	slate+m	brown+m	violet+m	aqua+m	transparent	orange+m	pink+m
red	green	blue	yellow	white	slate	brown	violet	aqua	black	orange	pink

Optical parameters	
Operation wavelength, nm	1310-1550
Attenuation coefficient at wavelength, dB/km, not more than	
1310 nm	0,36
1383 nm	0,35
1550 nm	0,22
Mechanical characteristics	
Calculated tensile strength, not less than, kN	
Dynamic	0,25
Short-term crush test, kN/cm (N/10cm)	0,1 (1000)
Resistance to axial torsion at angle $\pm 360^{\circ}$ on 1 m length cable	Resistant
Resistance to bends at angle $\pm 90^{\circ}$ with a radius equal to 15 nominal cable diameters	Resistant
Resistance to impact 2,0 J	Resistant
Minimum bending radius	15D
Temperature range/Environment	
Operating temperature	from -20 to +70 °C
Installation temperature	from -10 to +60 °C
Storage and transportation temperature	from -20 to +70 °C
Resistance to water penetration	Water resistant
Relative humidity at +35° C, %	98
Cable factory length, km	4,0/6,0
Package	Coil OKKO №1 (490x440x490) Coil OKKO №2 (600x445x600)
Tolerance, %	$\pm 3,0$
Short lengths (customer approval)	Maximum 5%
The accuracy of marking	$\pm 0,5\%$