


### **TECHNICAL DESCRIPTION OF FIBER OPTIC CABLE**

#### 1. Cable construction

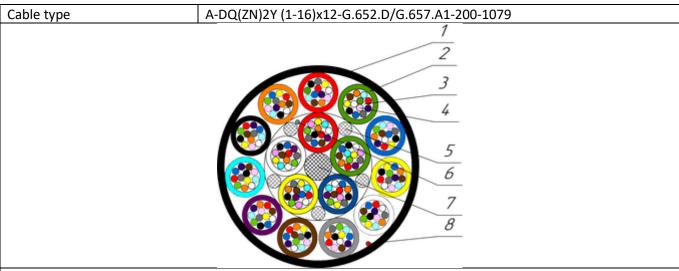

Cable construction

1. Outer sheath: UV-resistant PE

2. Optical loose tube: 1,45mm PBT Tube

3. Intramodule compound: Thixotropic compound

4. Optical Fiber: 200 mkm Single-mode Fiber according to ITU-T G.652.D and G.657.A1

5. Peripheral strength element: Glass reinforced plastic 0,5mm FRP-E

6. Water-blocking element of core: Water-swellable yarn

7.Central strength element: Glass reinforced plastic 1,0mm FRP-E

8. Rip-cord: Water-swellable yarn

Temperature ranges	Storage and transportation	Installation	Operating					
	temperature	temperature	temperature					
	from -40 to +70 °C	from -15 to +50 °C	from -20 to +70 °C					
Resistance to water		Water resistant						
penetration								
Relative humidity at +35° C, %	98							
Outer diameter, mm	7,8±0,2							
Average weight of 1 km of the	50±5%							
cable, kg								

#### 2. Mechanical characteristics

Calculated tensile strength, not less than <sup>1</sup> , kN Dynamic	0,8
Minimum bending radius	20D
Short-term crush test, kN/cm (N/10cm)	0,05 (500)
Resistance to axial torsion at angle ±360° on 4 m length cable	Resistant
Resistance to bends at angle $\pm 90^{\circ}$ with a radius equal to 20 nominal cable diameters	Resistant
Resistance to impact 10 J	Resistant

 $<sup>^{\</sup>rm 1}$  Tensile strength value is for maximum number of fibers design

-



# 3. Packaging and marking

Cable factory length, km	6
Package	Drum №12a (1221x855x1221)
Tolerance, %	±3,0
Short lengths (customer approval)	Maximum 5%
Marking method	Inkjet printing
The accuracy of marking, %	±0,5

# 4. Coloring

Coloring of fibers in loose tube (According to Customer's requirements color can be different).											
1	2	3	4	5	6	7	8	9	10	11	12
red	green	blue	yellow	white	slate	brown	violet	aqua	black	orange	pink

Coloring of optical loose tube (According to Customer's requirements color can be different).												
	Layer 1					Layer 2						
1	2	3	4	5	5 1 2 3 4 5					6	7	
red	green	blue	yellow	white	red	green	blue	yellow	white	slate	brown	
Layer 2												
8 9				10 11								
violet aqua					black			orange				

### 5. Product data

Fiber count	192
Loose tubes x fibers	16x12