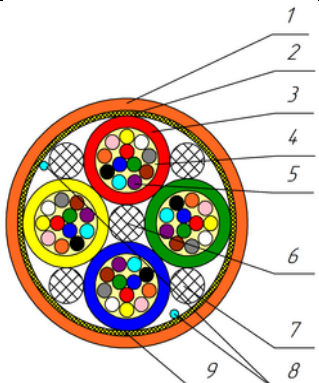


## TECHNICAL DESCRIPTION OF FIBER OPTIC CABLE

### 1. Cable construction

Cable type	A-DQ(ZN)B4Y-(1-4)x12-G.652.D/G.657.A1-1033		
			
Cable construction			
1. Outer sheath:PA			
2. Strength element of core:aramid yarns			
3. Optical loose tube: 1,45mm PBT Tube			
4. Intramodule compound: Thixotropic compound			
5. Optical Fiber: Single-mode Fibre according to ITU-T G.652.D and G.657.A1			
6. Central strength element: Glass reinforced plastic 6,0mm FRP-E			
7. Peripheral strength element: Glass reinforced plastic 0,6mm FRP-E			
8. Water-blocking element of core: Water-swellable yarn			
9. Rip-cord: Water-swellable yarn			
Temperature ranges	Storage and transportation temperature	Installation temperature	Operating temperature
	from -30 to +70 °C	from -5 to +50 °C	from -20 to +60 °C
Resistance to water penetration	Water resistant		
Relative humidity at +35° C, %	98		
Outer diameter, mm	4,2±0,2		
Average weight of 1 km of the cable, kg	15±5%		

### 2. Mechanical characteristics

Calculated tensile strength, not less than <sup>1</sup> , kN Dynamic	0,75
Minimum bending radius	20D
Short-term crush test, kN/cm (N/10cm)	0,12 (1200)
Resistance to axial torsion at angle ±360° on 1 m length cable	Resistant
Resistance to bends at angle ± 90° with a radius equal to 20 nominal cable diameters	Resistant
Resistance to impact 2 J	Resistant

<sup>1</sup> Tensile strength value is for maximum number of fibers design

### 3. Packaging and marking

Cable factory length, km	6
Package	Drum №8 (801x625x801)
Tolerance, %	±3,0
Short lengths (customer approval)	Maximum 5%
Marking method	Inkjet printing
The accuracy of marking, %	±0,5

### 4. Coloring

Coloring of fibers in loose tube (According to Customer's requirements color can be different).											
1	2	3	4	5	6	7	8	9	10	11	12
red	green	blue	yellow	white	slate	brown	violet	aqua	black	orange	pink

Coloring of optical loose tube (According to Customer's requirements color can be different). Core-filler color is natural.			
1	2	3	4
red	green	blue	yellow

### 5. Product data

Fiber count	12	24	48
Loose tubes x fibers	1x12	2x12	4x12