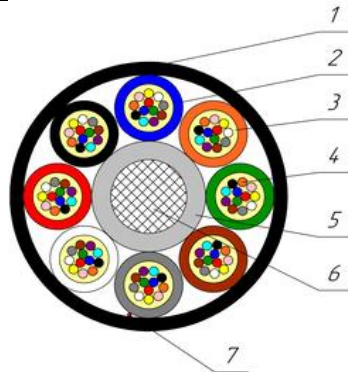


## TECHNICAL DESCRIPTION OF FIBER OPTIC CABLE

### 1. Cable construction

Cable type	A-DQ(ZN)2Y-(1-8)x12-250-652D/657A1-1034		
<div></div>			
<p>Cable construction</p> <p>1. Outer sheath:UV-resistant PE</p> <p>2. Optical loose tube: 1,8mm PBT Tube</p> <p>3. Intramodule compound: Thixotropic compound</p> <p>4. Optical Fiber: Single-mode Fiber according to ITU-T G.652.D and G.657.A1</p> <p>5. Insulation of central strength element:PE</p> <p>6. Central strength element: Glass reinforced plastic 2,0mm FRP-E with insulation up to 3,0mm</p> <p>7. Rip-cord: Water-swellable yarn</p>			
Temperature ranges	Storage and transportation temperature	Installation temperature	Operating temperature
	from -40 to +70 °C	from -10 to +50 °C	from -40 to +60 °C
Resistance to water penetration	Water resistant		
Relative humidity at +35 <sup>0</sup> C, %	98		
Outer diameter, mm	7,3±0,2		
Average weight of 1 km of the cable, kg	47±5%		

### 2. Mechanical characteristics

Calculated tensile strength, not less than <sup>1</sup> , kN	
Dynamic	2
Minimum bending radius	20D
Short-term crush test, kN/cm (N/10cm)	0,12 (1200)
Resistance to axial torsion at angle ±360° on 4 m length cable	Resistant
Resistance to bends at angle ± 90° with a radius equal to 20 nominal cable diameters	Resistant
Resistance to impact 5 J	Resistant

<sup>1</sup> Tensile strength value is for maximum number of fibers design

### 3. Packaging and marking

Cable factory length, km	6
Package	Drum №12a (1221x855x1221)
Tolerance, %	±3,0
Short lengths (customer approval)	Maximum 5%
Marking method	Inkjet printing
The accuracy of marking, %	±0,5

### 4. Coloring

Coloring of fibers in loose tube (According to Customer's requirements color can be different).											
1	2	3	4	5	6	7	8	9	10	11	12
red	green	blue	yellow	white	slate	brown	violet	aqua	black	orange	pink

Coloring of optical loose tube (According to Customer's requirements color can be different). Core-filler color is natural.							
1	2	3	4	5	6	7	8
red	green	blue	yellow	white	slate	brown	violet

### 5. Product data

Fiber count	24	48	72	96
Loose tubes x fibers	2x12	4x12	6x12	8x12