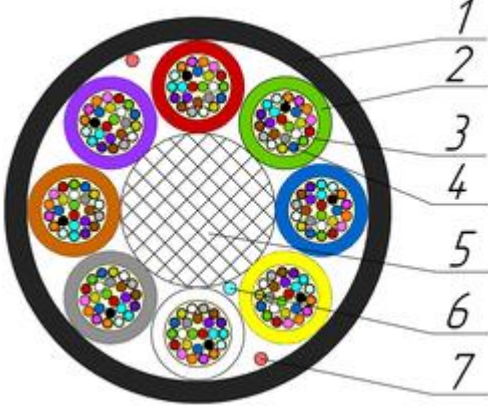


## TECHNICAL DESCRIPTION OF FIBER OPTIC CABLE

### Cable construction

Cable type	A-DQ(ZN)2Y 8x24/A-DQ(ZN)4Y 8x24 10134		
Standards	IEC 60793, IEC 60794		
			
<p>Cable construction</p> <ol style="list-style-type: none"> <li>Outer sheath: UV-resistant PE/PA</li> <li>Optical loose tube: PBT Tube</li> <li>Intramodule compound: Thixotropic compound</li> <li>Optical Fiber: 200 μm Single-mode Fiber according to ITU-T G.652.D/G.657.A1</li> <li>Central strength element: Glass reinforced plastic FRP-E</li> <li>Water-blocking element of core: Water-swellable yarn</li> <li>Rip-cord: Water-swellable yarn</li> </ol>			
Temperature ranges	Storage and transportation temperature	Installation temperature	Operating temperature
	from -40 to +70 °C	from -15 to 50 °C	from -30 to +70 °C
Resistance to water penetration	Water resistant		
Relative humidity at +35° C, %	98		
Outer diameter, mm	7,4±0,2		
Average weight of 1 km of the cable, kg	53±5%		

### Mechanical characteristics

Calculated tensile strength, not less than <sup>1</sup> , kN	
Dynamic	4
Minimum bending radius	15D
Short-term crush test, kN/cm (N/10cm)	0,12 (1200)
Resistance to axial torsion at angle ±360° on 2 m length cable	Resistant
Resistance to bends at angle ± 90° with a radius equal to 15 nominal cable diameters	Resistant
Resistance to impact 5 J	Resistant

<sup>1</sup> Tensile strength value is for maximum number of fibers design

## Packaging and marking

Cable factory length, km	6
Package	Drum №12a (1200x855x1200)
Tolerance, %	±3,0
Short lengths (customer approval)	Maximum 5%
Marking method	Inkjet printing
The accuracy of marking, %	±0,5

## Coloring

Coloring of fibers in loose tube (According to Customer's requirements color can be different). M-fiber with black ring mark.											
1	2	3	4	5	6	7	8	9	10	11	12
red	green	blue	yellow	white	slate	brown	violet	aqua	black	orange	pink
13	14	15	16	17	18	19	20	21	22	23	24
red+m	green+m	blue+m	yellow+m	white+m	slate+m	brown+m	violet+m	aqua+m	transparent	orange+m	pink+m

Coloring of optical loose tube (According to Customer's requirements color can be different).							
1	2	3	4	5	6	7	8
red	green	blue	yellow	white	slate	brown	violet

Cable sheath coloring		
Sheath material	PE	PA
Color	black	orange

## Product data

Fiber count	192
Loose tubes x fibers	8x24