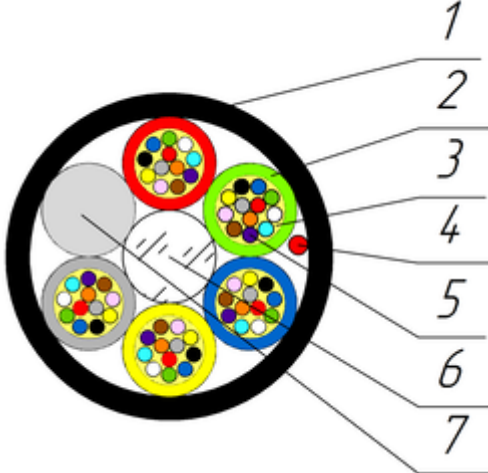


## TECHNICAL DESCRIPTION OF FIBER OPTIC CABLE

### 1. Cable construction

Cable type	A-DQ(ZN)2Y (1-6)x12-G.652.D/G.657.A1-200-1038		
			
<p>Cable construction</p> <ol style="list-style-type: none"> <li>1. Outer sheath: UV-resistant PE</li> <li>2. Optical loose tube: 1,2mm PBT Tube</li> <li>3. Intramodule compound: Thixotropic compound</li> <li>4. Rip-cord: Water-swellaable yarn</li> <li>5. Optical Fiber: 200 mkm Single-mode Fibre according to ITU-T G.652.D and G.657.A1</li> <li>6. Central strength element: Glass reinforced plastic 1,2mm FRP-E</li> <li>7. Core filler: PE</li> </ol>			
Temperature ranges	Storage and transportation temperature	Installation temperature	Operating temperature
	from -30 to +70 °C	from -10 to +50 °C	from -20 to +70 °C
Resistance to water penetration	Water resistant		
Relative humidity at +35° C, %	98		
Outer diameter, mm	4,2±0,2		
Average weight of 1 km of the cable, kg	16,5±5%		

### 2. Mechanical characteristics

Calculated tensile strength, not less than <sup>1</sup> , kN Dynamic	0,6
Minimum bending radius	20D
Short-term crush test, kN/cm (N/10cm)	0,05 (500)
Resistance to axial torsion at angle ±360° on 4 m length cable	Resistant
Resistance to bends at angle ± 90° with a radius equal to 20 nominal cable diameters	Resistant
Resistance to impact 2 J	Resistant

<sup>1</sup> Tensile strength value is for maximum number of fibers design

### 3. Packaging and marking

Cable factory length, km	6
Package	Drum №8 (801x625x801)
Tolerance, %	±3,0
Short lengths (customer approval)	Maximum 5%
Marking method	Inkjet printing
The accuracy of marking, %	±0,5

### 4. Coloring

Coloring of fibers in loose tube (According to Customer's requirements color can be different).											
1	2	3	4	5	6	7	8	9	10	11	12
red	green	blue	yellow	white	slate	brown	violet	aqua	black	orange	pink

Coloring of optical loose tube (According to Customer's requirements color can be different). Core-filler color is natural.					
1	2	3	4	5	6
red	green	blue	yellow	white	slate

### 5. Product data

Fiber count	12	24	48	72
Loose tubes x fibers	1x12	2x12	4x12	6x12